

Technical Parameter

Type		AXE-B17	AXE-B11
Scan mode	Ultra-fast scanning	17 blue laser crosses	11 blue laser crosses
	Deep hole scanning	1 extra bule laser line	
Accuracy ⁽¹⁾		Up to 0.020 mm (0.0008 in)	
Measurement rate up to		2,000,000 measurements/s	1,300,000 measurements/s
Scanning area up to		860 mm × 600 mm (33.9 in × 23.6 in)	550 mm × 600 mm (21.7 in × 23.6 in)
Scanning area (photogrammetry)	Scanning area	3760 mm x 3150 mm (148.0 in × 124.0 in)	2500 mm x 3000 mm (98.4 in × 118.1 in)
	Depth of field	2500 mm (98.4 in)	
Laser class		CLASS II (eye-safe)	
Resolution up to		0.025 mm (0.0009 in)	
Volume accuracy ⁽²⁾	Work alone	0.020 m m+ 0.030 mm/m (0.0008 in + 0.00036 in/ft)	0.020 m m+ 0.035 mm/m (0.0008 in + 0.0004 in/ft)
	Work with 1m reference bar	0.020 mm + 0.020 mm/m (0.0008 in + 0.00024 in/ft)	
	Work with MSCAN-L15	0.020 mm + 0.012 mm/m (0.0008 in + 0.00014 in/ft)	
Stand-off distance		300mm (11.8 in)	
Depth of field		500mm (19.7 in)	
Output formats		.stl, .obj, .ply, .asc, .igs, .txt, .mk2, .umk and etc.	
Operating temperature range		-10°C - 40°C (14°F-104°F)	
Interface mode		USB 3.0	
Patents		CN204329903U, CN104501740B, CN104165600B, CN204988183U, CN204854633U, CN204944431U, CN204902788U, CN105068384B, CN105049664B, CN204902784U, CN204963812U, CN204902785U, CN204902790U, CN106403845B, CN209197685U, CN209263911U, CN206905709U, CN107202554B, US10309770B2, KR102096806B1, KR102209255B1, US10914576B2CN204329903U, CN104501740B, CN104165600B, CN204988183U, CN204854633U, CN204944431U, CN204902788U, CN105068384B, CN105049664B, CN204902784U, CN204963812U, CN204902785U, CN204902790U, CN106403845B, CN209197685U, CN209263911U, CN206905709U, CN107202554B, US10309770B2, KR102096806B1, KR102209255B1, US10914576B2	

(1) ISO 17025 accredited: Based on VDI/VDE 2634 Part 3 standard and JJF 1951 specification, probing error (size) (PS) performance is evaluated.
(2) ISO 17025 accredited: Based on VDI/VDE 2634 Part3 standard and JJF 1951 specification, sphere spacing error (SD) performance is evaluated.

SCANTECH (HANGZHOU) CO., LTD. (HQ.)

Building 12, No.998, West Wenyi Road, Yuhang District, Hangzhou, Zhejiang Province, China
Tel : 0086-571-85852597 Fax : 0086-571-85370381
E-mail : info@3d-scantech.com
Website : www.3d-scantech.com

SCANTECH DIGITAL GmbH.

Dieselstrasse 18, 70771 Leinfelden-Echterdingen, Echterdingen industrial park
Tel : 0711 31013901
E-mail : info@3d-scantech.com

SCANTECH DIGITAL Inc.

611 Gateway Blvd. Suite # 120.South San Francisco, CA 94080
E-mail : info@3d-scantech.com



Copyright ©



AXE-B17 3D Scanner

Measuring An Ultra-wide 3D world




SCANTECH (HANGZHOU) CO., LTD



AXE-B17 3D scanner utilizes optical measurement technology with a scanning speed of 2,000,000 measurements/s, quickly capturing 3D data of the object and getting precise deviations on the geometric surface.

With global initiative built-in photogrammetry system, AXE-B17 outputs ultra-large scanning area and metrology-grade measurement accuracy. Getting rid of limitations like size, shape, material and complexity of the object, AXE-B17 can freely choose working modes of efficient unrivaled-speed scanning and accurate deep hole scanning. It generates high precision 3D inspection of medium to large-sized projects without the aid of extra devices.

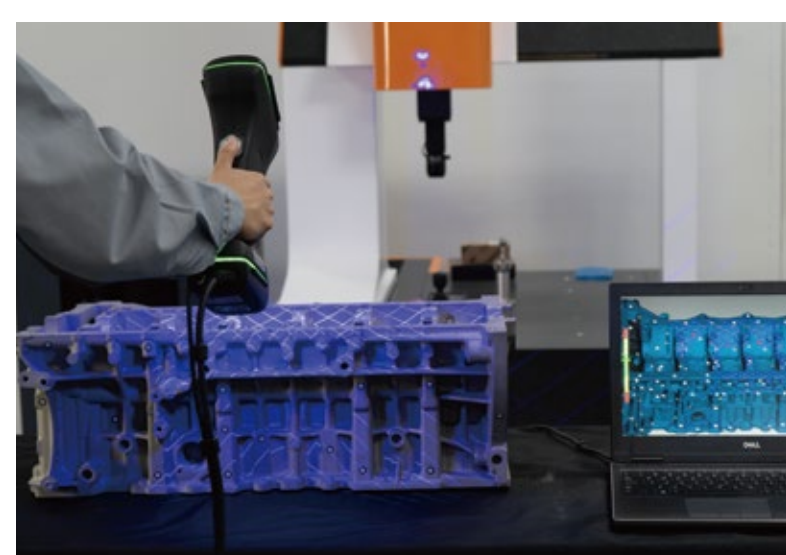

Extreme-fast Response

17 crossed blue laser lines enable extreme fast and precise response with 2,000,000 measurements/s, offering extraordinary work efficiency.



Flexible Switching

Working modes are capable of freely switching based on scanning needs: efficient unrivaled-speed scanning; accurate deep hole scanning, dealing with intricate positions like deep holes and dead angles.



Unprecedented Patent

The global initiative built-in photogrammetry system is tailored for measuring medium to large-sized objects, with 0.030 mm/m of volumetric accuracy.



Ultra-wide Vision

Ultra-wide scanning area of 860 mm × 600 mm allows an optimal and smoother 3D scanning experience.